

Lexmark C925dte



The Lexmark C925dte color printer delivers outstanding A3 color printing, easy-to-use features and productivity solutions, all through an affordable, compact design.

Print Technology

Color LED

Print Speed (Letter, Black)

Up to 30 ppm

Print Speed (Letter, Color)

Up to 30 ppm

Print Speed (Letter, Black) Duplex

Up to 26 spm

Time to First Page (Black)

As fast as 9 seconds

Time to First Page (Color)

As fast as 11 seconds

Print Resolution, Black

1200 Image Quality, 600 x 600 dpi

Print Resolution, Color

1200 Image Quality, 600 x 600 dpi

Processor

800 MHz

Memory, Standard

1280 MB

Memory, Maximum

1280 MB

Hard Disk

Option available

Apple Macintosh Operating Systems Supported

Mac OS X

Citrix MetaFrame

Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0

Linux Operating Systems Supported

Linspire Linux 6.0, Debian GNU/Linux 5.0, SUSE Linux Enterprise Server 10, 11, SUSE Linux Enterprise Desktop 10, 11, openSUSE 11.0, 11.1, Red Hat Enterprise Linux WS 4.0, 5.0, Red Flag Linux Desktop 6.0, Linpus Linux Desktop 9.6, Ubuntu 9.04, 9.10, 10.04, Fedora 12, 13

Microsoft Windows Operating Systems Supported

2000, XP, Server 2003, XP x64, Server 2003 running Terminal Services, 2000 Server running Terminal Services, Server 2003 x64, Server 2003 x64 running Terminal Services, Vista, Vista x64, Server 2008, Server 2008 x64, Server 2008 running Terminal Services, Server 2008 x64 running Terminal Services, Windows 7, Windows 7 x64, Server 2008 R2, Server 2008 R2 running Terminal Services

Novell Operating Systems Supported

NetWare 6.5 Open Enterprise Server, NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS), Open Enterprise Server on SUSE Linux Enterprise Server

UNIX Operating Systems Supported

Sun Solaris SPARC 8, 9, 10, Sun Solaris x86 10, HP-UX 11.11, 11.23, 11.31, IBM AIX 5.2, 5.3, 6.1, Sun openSolaris SPARC 2010.02, Sun openSolaris X86 2010.02

Paper Handling Standard

150-Sheet Input Tray, 250-Sheet Output Bin, Integrated Duplex, 250-Sheet Input Tray, 550-Sheet Drawer, 50-Sheet Multipurpose Feeder

Paper Handling Optional

550-Sheet Drawer

Paper Input Capacity, Standard: Up to

1000 pages 20 lb or 75 gsm bond

Paper Input Capacity, Maximum: Up to

2100 pages 20 lb or 75 gsm bond

Paper Output Capacity, Standard: Up to

250 pages 20 lb or 75 gsm bond

Paper Output Capacity, Maximum: Up to

250 pages 20 lb or 75 gsm bond

Finishing Option

No

Number of Paper Inputs, Standard

4

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Envelopes, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Oficio, A6

page Black High Yield Toner Cartridge

Packaged Size (in. - H x W x D)

46.9 x 26.77 x 29.49 in.

Size (in. - H x W x D)

21.86 x 24.49 x 21.93 in.

Size, Trays Extended (in. - H x W x D)

21.86 x 34.0 x 36.93 in.

Weight (lb.)

137.3 lb.

Noise Level, Idle

39 dBA

Print Noise Level, Operating

53 dBA

Product Warranty

1-Year Onsite Service, Next Business Day

Maximum Monthly Duty Cycle Up to

200000 pages per month **Recommended**

Monthly Page Volume

2500 - 10000 pages

Standard Ports

USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified Port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)

Optional Network Ports

External MarkNet™ N7020e Gigabit Ethernet, Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), HTTP, NDS Queue-based Printing, NDPS/NEPS (Novell Distributed Print Services, Novell Netware Enterprise Print Services), Enhanced IP (Port 9400), FTP, TFTP, IPP 1.1 (Internet Printing Protocol), ThinPrint .print integration

Network Protocol Support

TCP/IP IPv4, AppleTalk™, TCP/IP IPv6, TCP, UDP

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

Printable Area

0.197 inches of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, xHTML, PDF 1.6, Direct Image, Microsoft XPS (XML Paper Specification)


Supplies Yield

7,500*-page Color (CMY) High Yield Toner Cartridges, 8,500*-page Black High Yield Toner Cartridge

*Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Cartridge(s) Shipping with Product

7,500*-page Color (CMY) High Yield Toner Cartridges, 8,500*-

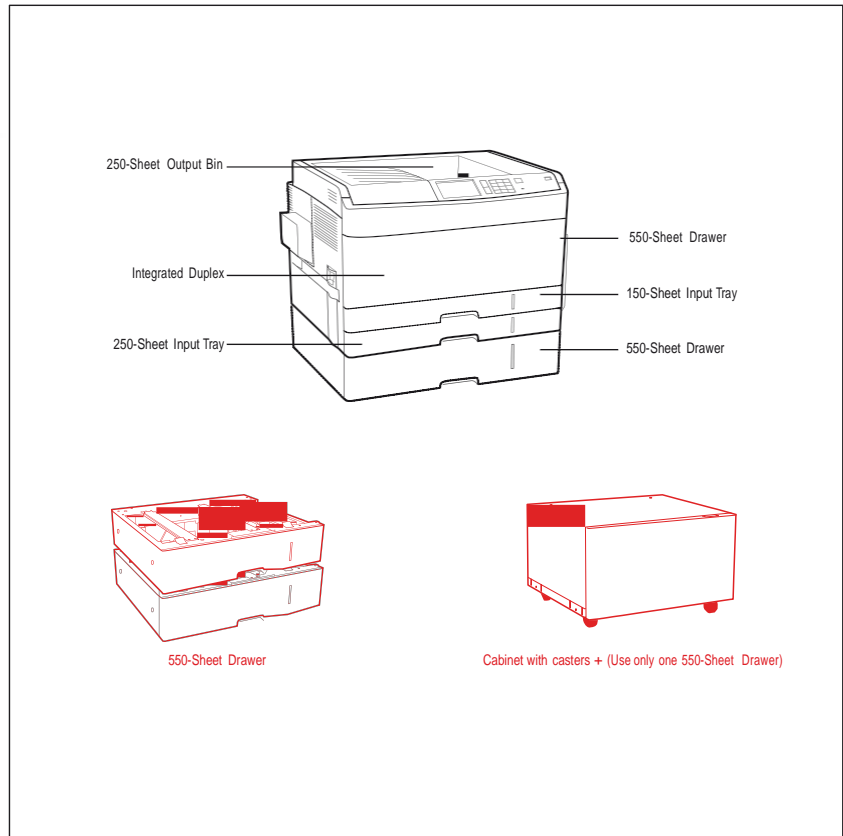

Paper Handling Standard
 Paper Handling Optional

| Part # | Model |
|---------|-----------------|
| 24Z0056 | Lexmark C925dte |

| Part # | Laser Toner/Print Cartridge |
|----------|---|
| C925H2KG | C925 Black High Yield Toner Cartridge |
| C925H2CG | C925 Cyan High Yield Toner Cartridge |
| C925H2MG | C925 Magenta High Yield Toner Cartridge |
| C925H2YG | C925 Yellow High Yield Toner Cartridge |
| C925X72G | C925, X925 Black Imaging Unit |
| C925X73G | C925, X925 Cyan Imaging Unit C925X74G |
| | C925, X925 Magenta Imaging Unit |
| C925X75G | C925, X925 Yellow Imaging Unit |
| C925X76G | C925, X925 Waste Toner Bottle |

| Part # | Paper Handling |
|---------|-----------------------------|
| 24Z0030 | C925, X925 550-Sheet Drawer |

| Part # | Furniture |
|---------|---------------------------------|
| 24Z0031 | C925, X925 Cabinet with casters |

| Part # | Memory Options |
|---------|-------------------------------|
| 14F0245 | 256MB Flash Card |
| 27X0014 | 160+ GB Hard Disk |
| 30G0287 | Arabic Font Card |
| 30G0828 | Japanese Font Card |
| 30G0825 | Korean Font Card |
| 30G0826 | Simplified Chinese Font Card |
| 30G0827 | Traditional Chinese Font Card |

| Part # | Application Solutions |
|---------|-----------------------------------|
| 24Z0040 | C925 Card for PRESCRIBE Emulation |
| 24Z0038 | C925 Forms and Bar Code Card |
| 24Z0039 | C925 Card for IPDS |
| 57X9000 | Lexmark PrintCryption Card |

| Part # | Connectivity |
|---------|--|
| 1021294 | USB Cable (2-meter) |
| 24Z0060 | C925 MarkNet N8120 Gigabit Ethernet Print Server |
| 24Z0061 | C925 MarkNet N8130 Fiber Ethernet 100BaseFX, 10BaseFL Print Server |
| 24Z0062 | C925 MarkNet N8250 802.11b/g/n Wireless Print Server |
| 24Z0065 | C925 Parallel 1284-B Interface Card Kit |
| 1021231 | Parallel Cable (10-foot) |
| 24Z0064 | C925 RS-232C Serial Interface Card Kit |
| 14T0230 | MarkNet™ N7000e Fast Ethernet Print Server - USB |
| 14T0240 | MarkNet™ N7002e Fast Ethernet Print Server - Parallel |
| 14T0220 | MarkNet™ N7020e Gigabit Ethernet Print Server |

| Part # | Extended Warranties |
|---------|--|
| 2353798 | C925 2-Years Total Onsite Service, Next Business Day |
| 2353799 | C925 3-Years Total Onsite Service, Next Business Day |

| | |
|---------|---|
| 2353800 | C925 4-Years Total Onsite Service, Next Business Day |
| 2353801 | C925 5-Years Total Onsite Service, Next Business Day |
| 2353802 | C925 1-Year Onsite Service Renewal, Next Business Day |

| Part # | User Replaceable Parts |
|---------|---|
| 40X6013 | C925, X925 Fuser Maintenance Kit 110-120V |
| 40X6011 | C925, X925 Transfer Belt and Roll |

| Part # | Installation Service |
|---------|----------------------------------|
| 2353805 | C925 Install, De-Install Service |